



**ABBY**  
LIGHTING

PROFILE - PENDANT : **CANALAZZO P 60 15W**

**TECHNICAL SPECIFICATIONS**

**PRODUCT REFERENCE**

Environment Indoor  
Installation Ceiling Pendant / Recess^

**CONSTRUCTION & MATERIALS**

Housing Aluminium  
Lens or Diffuser Premium High Transmission PMMA  
Reflector Aluminium Matt  
Finish Powder Painted White / Black / Custom

**THERMAL MANAGEMENT**


Heat Sink Material Aluminium  
Cooling Technique Passive

**OPTICAL SYSTEM**

Beam Angles (FWHM)<sup>o</sup> General Illumination  
Beam Direction Fixed  
Tilt No  
Swivel No

**ELECTRICAL SYSTEM**

Driven With Constant Current Driver  
Input Voltage 220V-240V  
Input Power 14.61w  
Power Factor >0.9  
ATHD <10%  
Control Gear Mounting Integral

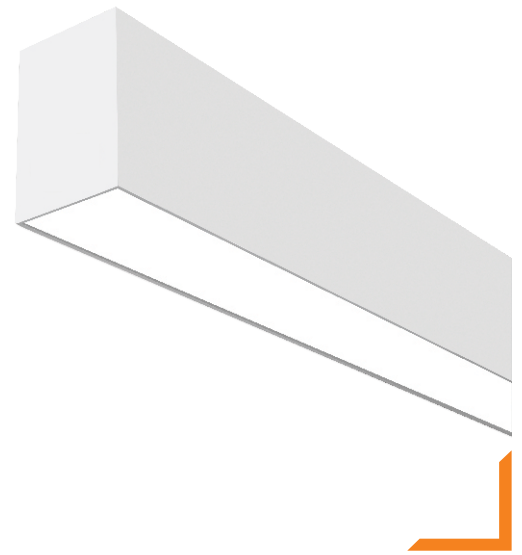

**DIMMING**

Dimming Options Consult ABBY Representative

**LED TECHNOLOGY**

Led Fitted SAMSUNG  
Lumen Output System (Delivered)\* 1458 1512 1564  
Efficacy (System - lm/watt)\* 100 103 107  
Co-related Colour Temp. 3000K 4000K 6000K  
Led Life Time @ L70 / B10 50,000 hours  
Colour Rendering CRI >80

**ORDERING INFORMATION**

While ordering mention **one code from each** of the following columns

PRODUCT CODE	LED COLOUR	BEAM ANGLE	FINISH	DIMMING OPTION
CANALAZZO P 60 15W	Warm White 3000K Neutral White 4000K Cool White 6000K	General Illumination	White Black Custom	Non Dimmable 1-10v Dimmable Driver Phase Dimmable Driver Dali Dimmable Driver


**CANALAZZO P 60 15W - CW60K - - SWH - D Dim**

This is the ordering code for a CANALAZZO P 60 15W in Cool White, General Illumination, White Finish, and Dali Dimmable Driver.

**INSTALLATION**

Suspension Cable [Provided]

**LINE DRAWING**

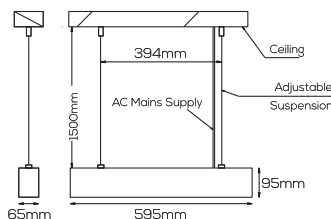

**PHOTOMETRY**



\*Order Canalazzo Pendant as Canalazzo P & Canalazzo Recess as Canalazzo R. Please consult an Abby representative for Continuous Mounting arrangement. Abby tries to ensure all data and information is correct at the time of publication. Data provided is for information purposes only. \*Output data figures stated are typical values for downlight only.