



### TECHNICAL SPECIFICATIONS

#### PRODUCT REFERENCE

Environment Indoor  
 Installation Ceiling Pendant / Recess^

#### CONSTRUCTION & MATERIALS

Housing Aluminium  
 Lens or Diffuser Premium High Transmission PMMA  
 Reflector Aluminium Matt  
 Finish Powder Painted White / Black / Custom

#### THERMAL MANAGEMENT


Heat Sink Material Aluminium  
 Cooling Technique Passive

#### OPTICAL SYSTEM

Beam Angles (FWHM)° General Illumination  
 Beam Direction Fixed  
 Tilt No  
 Swivel No

#### ELECTRICAL SYSTEM

Driven With Constant Current Driver  
 Input Voltage 220V-240V  
 Input Power 20.7w  
 Power Factor >0.9  
 ATHD <10%  
 Control Gear Mounting Integral

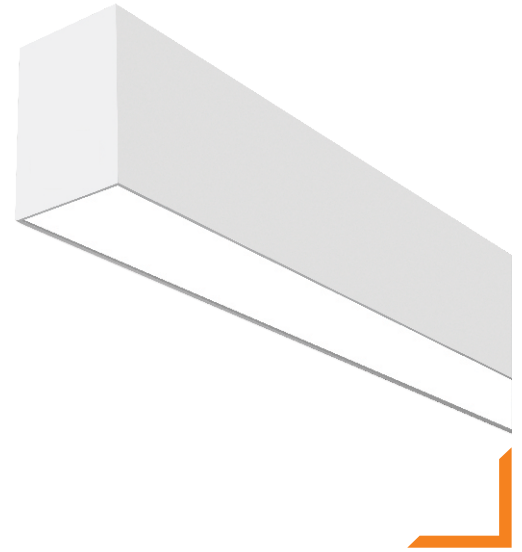

#### DIMMING

Dimming Options Consult ABBY Representative

#### LED TECHNOLOGY

Led Fitted SAMSUNG  
 Lumen Output System (Delivered)\* 2190 2267 2342  
 Efficacy (System - lm/watt)\* 104 108 111  
 Co-related Colour Temp. 3000K 4000K 6000K  
 Led Life Time @ L70 / B10 50,000 hours  
 Colour Rendering CRI >80

### ORDERING INFORMATION

While ordering mention **one code from each** of the following columns

PRODUCT CODE	LED COLOUR	BEAM ANGLE	FINISH	DIMMING OPTION
CANALAZZO P 120 20W	Warm White 3000K Neutral White 4000K Cool White 6000K	General Illumination	White Black Custom	Non Dimmable 1-10v Dimmable Driver Phase Dimmable Driver Dali Dimmable Driver


**CANALAZZO P 120 20W - CW60K - - SWH - D Dim**

This is the ordering code for a CANALAZZO P 120 20W in Cool White, General Illumination, White Finish, and Dali Dimmable Driver.

#### INSTALLATION

Suspension Cable [Provided]

#### LINE DRAWING

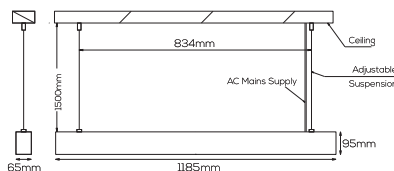

#### PHOTOMETRY



\*Order Canalazzo Pendant as Canalazzo P & Canalazzo Recess as Canalazzo R. Please consult an Abby representative for Continuous Mounting arrangement. Abby tries to ensure all data and information is correct at the time of publication. Data provided is for information purposes only. \*Output data figures stated are typical values for downlight only.