

Profiles

Canalazzo 120 30w S/P



Product Reference

Environment	Indoor
Installation	Ceiling Surface/Pendant

Construction and Materials

Housing	Aluminium
Lens or Diffuser	Premium High Transmission White PMMA, 75%
Reflector	Aluminium matt
Finish	Powder painted white/black

Thermal Management

Heat Sink material	Aluminium
Cooling technique	Passive

Optical system

Beam Angles	General illumination
Beam Direction	Fixed
Tilt	No
Swivel	No

Light technology

Led fitted	Samsung
Lumen Output at source	2973 2973 3197 3197
Co-related Color temp.	2700K 3000K 4000K 6000K
Led life time @ L70	35,000 hours
Colour rendering	>80

Electrical System


Driven with	Constant current driver
Input Voltage	100V-240V
Input Power	29.5w
Power Factor	>0.92
ATHD	<10%
Control Gear mounting	Integral with the fixture

Dimming

Optional- Consult Abby Representative

Installation

Installation by -/ Suspension cables(provided)

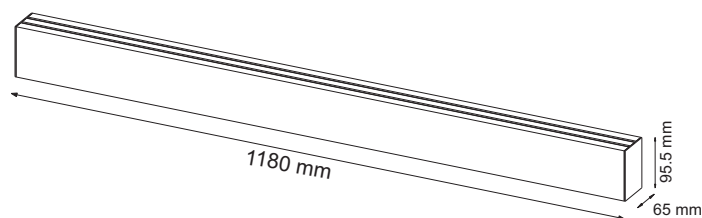

Application legend



Ordering Information

Canalazzo 120 30w S/P

Product code
Canalazzo120 30w Surface, Canalazzo120 30w S/WW30K/ /SWH/
Warm white 3000K
General illumination-wide, White,
Non dimmable

Mounting
Surface
Pendant


LED colour
Warm white 2700K
Warm white 3000K
Neutral white 4000K
Cool white 6000K

Beam Angle
General illumination

Finish
White
Black

Dimming option

Non dimmable
1-10v dimmable driver
Phase dimmable driver
Dali dimmable driver

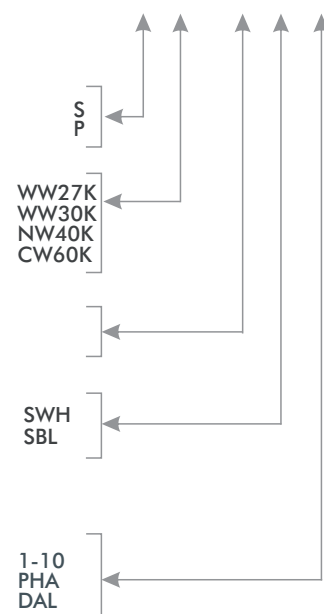

Photometry

