



TECHNICAL SPECIFICATIONS

PRODUCT REFERENCE

Environment Indoor
 Installation Ceiling Pendant / Recess^

CONSTRUCTION & MATERIALS

Housing Aluminium
 Lens or Diffuser Premium High Transmission PMMA
 Reflector Aluminium Matt
 Finish Powder Painted White / Black / Custom

THERMAL MANAGEMENT


Heat Sink Material Aluminium
 Cooling Technique Passive

OPTICAL SYSTEM

Beam Angles (FWHM)^o General Illumination
 Beam Direction Fixed
 Tilt No
 Swivel No

ELECTRICAL SYSTEM

Driven With Constant Current Driver
 Input Voltage 220V-240V
 Input Power 38.44w
 Power Factor >0.9
 ATHD <10%
 Control Gear Mounting Integral

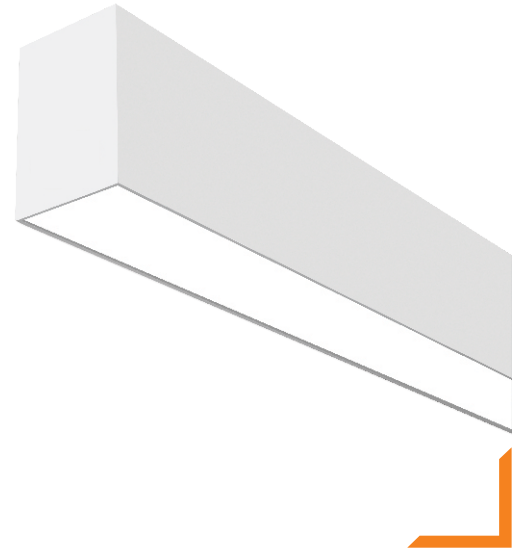

DIMMING

Dimming Options Consult ABBY Representative

LED TECHNOLOGY

Led Fitted SAMSUNG
 Lumen Output System (Delivered)* 3862 3999 4131
 Efficacy (System - lm/watt)* 100 104 107
 Co-related Colour Temp. 3000K 4000K 6000K
 Led Life Time @ L70 / B10 50,000 hours
 Colour Rendering CRI >80

ORDERING INFORMATION

While ordering mention **one code from each** of the following columns

PRODUCT CODE	LED COLOUR	BEAM ANGLE	FINISH	DIMMING OPTION
CANALAZZO P 120 40W	Warm White 3000K Neutral White 4000K Cool White 6000K	General Illumination	White Black Custom	Non Dimmable 1-10v Dimmable Driver Phase Dimmable Driver Dali Dimmable Driver


CANALAZZO P 120 40W - CW60K - - SWH - D Dim

This is the ordering code for a CANALAZZO P 120 40W in Cool White, General Illumination, White Finish, and Dali Dimmable Driver.


INSTALLATION

Suspension Cable [Provided]

LINE DRAWING

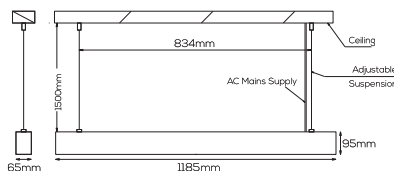

PHOTOMETRY

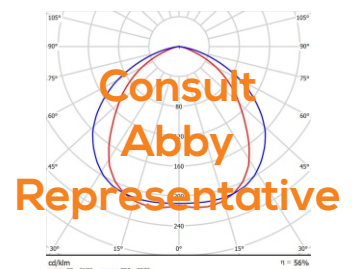

*Order Canalazzo Pendant as Canalazzo P & Canalazzo Recess as Canalazzo R. Please consult an Abby representative for Continuous Mounting arrangement. Abby tries to ensure all data and information is correct at the time of publication. Data provided is for information purposes only. *Output data figures stated are typical values for downlight only.