



ABBY
LIGHTING

SPOT & ACCENT - TRIMLESS : **BETA TRIMLESS 4-WAY 15W**

TECHNICAL SPECIFICATIONS

PRODUCT REFERENCE

Environment Indoor
Installation Ceiling Recess

CONSTRUCTION & MATERIALS

Housing Aluminium & Steel
Lens or Diffuser Clear PMMA
Reflector ABS Metallised
Finish Powder Painted White / Black

THERMAL MANAGEMENT

Heat Sink Material Aluminium, Black Anodised
Cooling Technique Passive

OPTICAL SYSTEM

Beam Angles (FWHM)° Spot (16), Medium (25), Wide (40)
Beam Direction Adjustable
Tilt Yes
Swivel No

ELECTRICAL SYSTEM

Driven With Constant Current Driver
Input Voltage 220V-240V
Input Power 58.4w
Power Factor >0.9
ATHD <10%
Control Gear Mounting Remote



DIMMING

Dimming Options Consult ABBY Representative

LED TECHNOLOGY

Led Fitted CREE
Lumen Output System (Delivered)* 5376 5564 6164
Efficacy (System - lm/watt)* 70 75 81
Co-related Colour Temp. 3000K 4000K 6000K
Led Life Time @ L70 / B10 50,000 hours
Colour Rendering CRI >80

ORDERING INFORMATION

While ordering mention **one code from each** of the following columns

PRODUCT CODE	LED COLOUR	BEAM ANGLE	FINISH	DIMMING OPTION
BETA TRIMLESS 4-WAY 15W	Warm White 3000K WW30K	Spot (16) SS	White SWH	Non Dimmable
	Neutral White 4000K NW40K	Medium (25) MD	Black SBL	1-10v Dimmable Driver A Dim
	Cool White 6000K CW60K	Wide (40) WD		Phase Dimmable Driver PC Dim
				Dali Dimmable Driver D Dim


BETA TRIMLESS 4-WAY 15W - CW60K - MD - SWH - D Dim

This is the ordering code for a BETA TRIMLESS 4-WAY 15W in Cool White, Medium Beam, White Finish, and Dali Dimmable Driver.

INSTALLATION


Cutout in mm 205mm x 205mm
Min void in ceiling height 115 mm
Installation by Spring clips

LINE DRAWING



L: 205mm x B: 205mm x Ht : 105mm

PHOTOMETRY

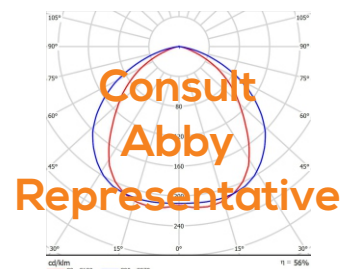

APPLICATION LEGEND



Abby tries to ensure all data and information is correct at the time of publication. Data provided is for information purposes only. *Output data figures stated are typical values for medium beam.