



ABBY
LIGHTING

OUTDOOR : HUSKY 15W

TECHNICAL SPECIFICATIONS

PRODUCT REFERENCE

Environment Outdoor
Installation Ground Surface

CONSTRUCTION & MATERIALS

Housing Extruded Aluminium Pole
Housing Aluminium Die Cast Light Head
Lens or Diffuser Translucent PMMA Diffuser
Finish Standard Anti Ageing Powder Coated Black RAL 9005

THERMAL MANAGEMENT

Heat Sink Material Aluminium
Cooling Technique Passive

OPTICAL SYSTEM

Beam Angles (FWHM)° General Illumination
Beam Direction Fixed
Tilt No
Swivel No

ELECTRICAL SYSTEM

Driven With Constant Current Driver
Input Voltage 220V-240V
Input Power 14.45w
ATHD <10%
Control Gear Mounting Intergral



DIMMING


Dimming Options Consult ABBY Representative

LED TECHNOLOGY

Led Fitted Samsung
Lumen Output System (Delivered)* 1317 1396 1448
Efficacy (System - lm/watt)* 91 97 100
Co-related Colour Temp. 3000K 4000K 6000K
Led Life Time @ L70 / B10 50,000 hours
Colour Rendering CRI >80
Driven Constant Current 350mA
Output Voltage 36v

ORDERING INFORMATION

While ordering mention **one code from each** of the following columns

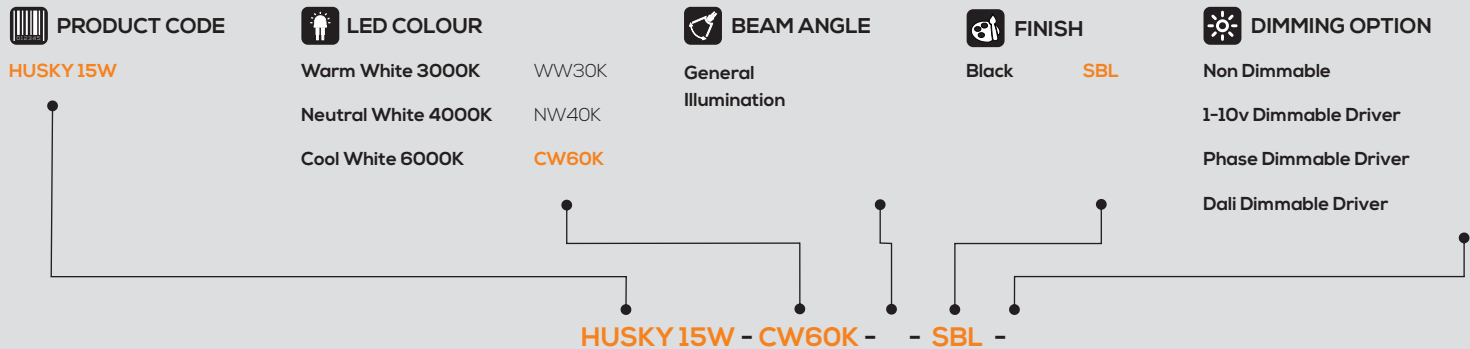


This is the ordering code for a HUSKY 15W in Cool White, General Illumination, Black Finish, and Non Dimmable Driver.


INSTALLATION

Base Plate (Provided)

LINE DRAWING



PHOTOMETRY

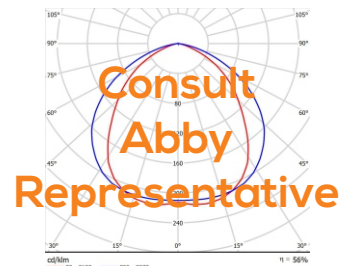

Abby tries to ensure all data and information is correct at the time of publication. Data provided is for information purposes only. *Output data figures stated are typical values.