



ABBY
LIGHTING

PROFILE - PENDANT : **CANALAZZO P 240 60W**

TECHNICAL SPECIFICATIONS

PRODUCT REFERENCE

Environment Indoor
Installation Ceiling Pendant / Recess^

CONSTRUCTION & MATERIALS

Housing Aluminium
Lens or Diffuser Premium High Transmission PMMA
Reflector Aluminium Matt
Finish Powder Painted White / Black / Custom

THERMAL MANAGEMENT


Heat Sink Material Aluminium
Cooling Technique Passive

OPTICAL SYSTEM

Beam Angles (FWHM)° General Illumination
Beam Direction Fixed
Tilt No
Swivel No

ELECTRICAL SYSTEM

Driven With Constant Current Driver
Input Voltage
Input Power 58.44w
Power Factor >0.9
ATHD <10%
Control Gear Mounting Integral

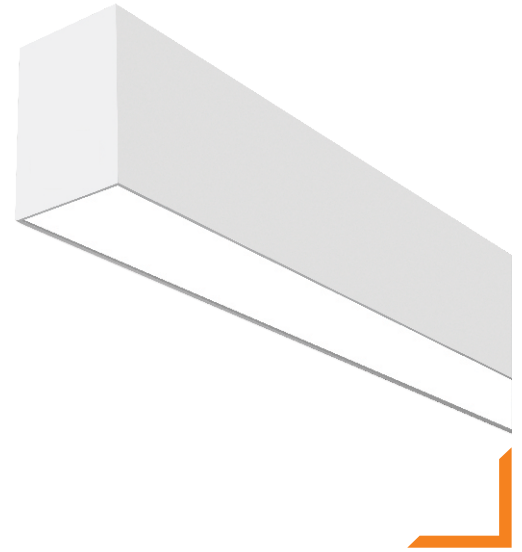

DIMMING

Dimming Options Consult ABBY Representative

LED TECHNOLOGY

Led Fitted SAMSUNG
Lumen Output System (Delivered)* 5832 6048 6256
Efficacy (System - lm/watt)* 97 101 104
Co-related Colour Temp. 3000K 4000K 6000K
Led Life Time @ L70 / B10 50,000 hours
Colour Rendering CRI >80

ORDERING INFORMATION

While ordering mention **one code from each** of the following columns

| PRODUCT CODE | LED COLOUR | BEAM ANGLE | FINISH | DIMMING OPTION |
|----------------------------|---|----------------------|--------------------------|--|
| CANALAZZO P 240 60W | Warm White 3000K Neutral White 4000K Cool White 6000K | General Illumination | White Black Custom | Non Dimmable 1-10v Dimmable Driver Phase Dimmable Driver Dali Dimmable Driver |


CANALAZZO P 240 60W - CW60K - - SWH - D Dim

This is the ordering code for a CANALAZZO P 240 60W in Cool White, General Illumination, White Finish, and Dali Dimmable Driver.

INSTALLATION

Suspension Cable [Provided]

LINE DRAWING

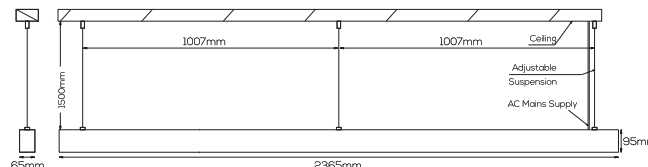

PHOTOMETRY



*Order Canalazzo Pendant as Canalazzo P & Canalazzo Recess as Canalazzo R. Please consult an Abby representative for Continuous Mounting arrangement. Abby tries to ensure all data and information is correct at the time of publication. Data provided is for information purposes only. *Output data figures stated are typical values for downlight only.