



ABBY
LIGHTING

PROFILE - RECESS : **CANALAZZO R 120 30W**

TECHNICAL SPECIFICATIONS

PRODUCT REFERENCE

Environment Indoor
Installation Ceiling Recess / Pendant[^]

CONSTRUCTION & MATERIALS

Housing Aluminium
Lens or Diffuser Premium High Transmission PMMA
Reflector Aluminium Matt
Finish Powder Painted White

THERMAL MANAGEMENT

Heat Sink Material Aluminium
Cooling Technique Passive

OPTICAL SYSTEM

Beam Angles (FWHM)^o General Illumination
Beam Direction Fixed
Tilt No
Swivel No

ELECTRICAL SYSTEM

Driven With Constant Current Driver
Input Voltage 220V-240V
Input Power 28.32w
Power Factor >0.9
ATHD <10%
Control Gear Mounting Integral



DIMMING

Dimming Options Consult ABBY Representative

LED TECHNOLOGY

Led Fitted SAMSUNG
Lumen Output System (Delivered)* 2913 3016 3115
Efficacy (System - lm/watt)* 103 106 110
Co-related Colour Temp. 3000K 4000K 6000K
Led Life Time @ L70 / B10 50,000 hours
Colour Rendering CRI >80

ORDERING INFORMATION

While ordering mention **one code from each** of the following columns

PRODUCT CODE	LED COLOUR	BEAM ANGLE	FINISH	DIMMING OPTION
CANALAZZO R 120 30W	Warm White 3000K Neutral White 4000K Cool White 6000K	General Illumination	White	Non Dimmable 1-10v Dimmable Driver Phase Dimmable Driver Dali Dimmable Driver
	WW30K NW40K CW60K		SWH	A Dim PC Dim D Dim


CANALAZZO R 120 30W - CW60K - - SWH - D Dim

This is the ordering code for a CANALAZZO R 120 30W in Cool White, General Illumination, White Finish, and Dali Dimmable Driver.

INSTALLATION

Cutout in mm 1188 mm x 66mm
Min void in ceiling height 105 mm
Installation by Bracket Provided

LINE DRAWING

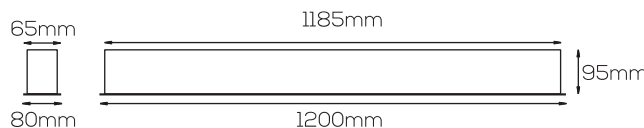

PHOTOMETRY



[^]Order Canalazzo Pendant as Canalazzo P & Canalazzo Recess as Canalazzo R. Please consult an Abby representative for Continuous Mounting arrangement.
Abby tries to ensure all data and information is correct at the time of publication. Data provided is for information purposes only.
^{*}Output data figures stated are typical values for downlight only.