



TECHNICAL SPECIFICATIONS

PRODUCT REFERENCE

Environment	Indoor
Installation	Ceiling Surface / Pendant [^]

CONSTRUCTION & MATERIALS

Housing	Aluminium
Lens or Diffuser	Poly Carbonate
Reflector	Aluminium Matt
Finish	Powder Painted White / Black / Custom

THERMAL MANAGEMENT

Heat Sink Material	Aluminium
Cooling Technique	Passive

OPTICAL SYSTEM

Beam Angles (FWHM) ^o	General Illumination
Beam Direction	Fixed
Tilt	No
Swivel	No

ELECTRICAL SYSTEM

Driven With	Constant Current Driver
Input Voltage	220V-240V
Input Power	39.08w
Power Factor	>0.9
ATHD	<10%
Control Gear Mounting	Integral

DIMMING

Dimming Options Consult ABBY Representative

LED TECHNOLOGY

Led Fitted	SAMSUNG
Lumen Output System (Delivered)*	3373 3596 3651
Efficacy (System - lm/watt)*	86 91 93
Co-related Colour Temp.	3000K 4000K 6000K
Led Life Time @ L70 / B10	50,000 hours
Colour Rendering CRI	>80



ORDERING INFORMATION

While ordering mention **one code from each** of the following columns

PRODUCT CODE	LED COLOUR	BEAM ANGLE	FINISH	DIMMING OPTION
LINEA S 120 40W	Warm White 3000K Neutral White 4000K Cool White 6000K	General Illumination	White Black Custom	Non Dimmable 1-10v Dimmable Driver Phase Dimmable Driver Dali Dimmable Driver
	WW30K NW40K CW60K		SWH SBL	A Dim PC Dim D Dim

LINEA S 120 40W - CW60K - - SWH - D Dim

This is the ordering code for a LINEA S 120 40W in Cool White, General Illumination, White Finish, and Dali Dimmable Driver.


INSTALLATION

Screw Mounting
Fixing Holes [Provided]

LINE DRAWING



PHOTOMETRY

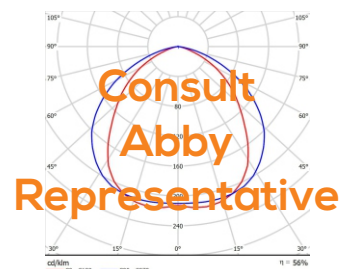

[^]Order Linea Pendant as Linea P & Linea Surface as Linea S.
Please consult an Abby representative for Uplight & Continuous Mounting arrangement.
Abby tries to ensure all data and information is correct at the time of publication.
Data provided is for information purposes only.
*Output data figures stated are typical values for downlight only.