

Surface

iPlane RC 25w



Product Reference

Environment	Indoor
Installation	Ceiling surface

Construction and Materials

Housing	Aluminium
Lens or Diffuser	White PMMA, 78%; Clear-etched PMMA
Reflector	White optics
Finish	Powder painted white

Thermal Management

Heat Sink material	Aluminium
Cooling technique	Passive

Optical system

Beam Angles	General illumination-wide
Beam Direction	Fixed
Tilt	No
Swivel	No

Light technology

Led fitted	Samsung
Lumen Output at source	2309 2309 2496 2496
Co-related Color temp.	2700K 3000K 4000K 6000K
Led life time @ L70	35,000 hours
Colour rendering	>80

Electrical System


Driven with	Constant current driver
Input Voltage	100V-240V
Input Power	24.4w
Power Factor	>0.92
ATHD	<15%
Control Gear mounting	Remote

Dimming

Optional- Consult Abby Representative

Installation

Installation by Ceiling bracket (provided)

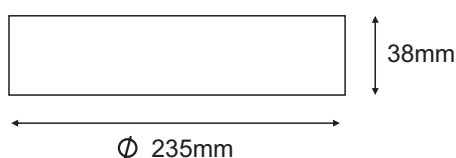

Ordering Information

iPlane RC 25w

Product code

iPlane RC 25w, Warm white 3000K, General illumination-wide, White Phase dimmable driver

iPlane RC 25w/WW30K/ / /PHA

LED colour

Warm white 2700K	WW27K
Warm white 3000K	WW30K
Neutral white 4000K	NW40K
Cool white 6000K	CW60K

Beam Angle


General illumination-wide

Finish


White

Dimming option

Non dimmable	
1-10v dimmable driver	1-10
Phase dimmable driver	PHA
Dali dimmable driver	DAL

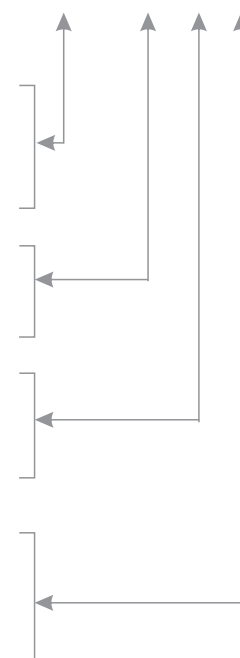

Photometry

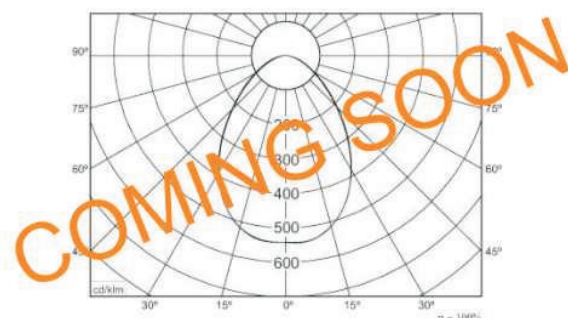

Application legend

