

Luke 50 2 Way | 2X15W

Product Reference

Environment Indoor

Installation Ceiling Recess

Construction & Materials

Housing Mild Steel

Primary Lens -

Primary Reflector PC metallised

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included




Mounting Remote

LED Power Watts 2x12.7W

System Power Watts 2x14.6W




Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

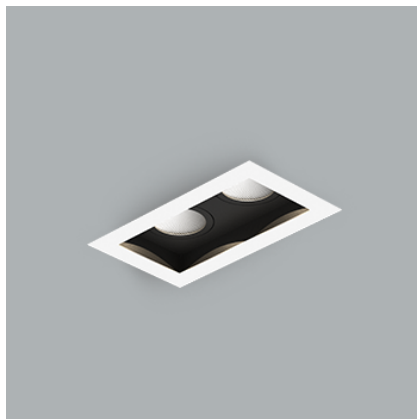

355° ±20°

Light Distribution



LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/350mA

Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Luke 50 2 Way	2X15W	WW27K	CRI80	17°(SS)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL	
Luke 50 2 Way	2X15W	2x1504	103	2700K	WW27K	CRI80	17°(SS)	White	SWH	Non Dimmable	On/Off
		2x1548	106	3000K	WW30K	CRI90	22°(MD)	Black	SBL	Phase Dimmable	PDIM
		2x1650	113	4000K	NW40K		35°(WD)	Custom	CSM	Dali Dimmable	DDIM
		2x1694	116	5700K	CW57K					Bluetooth Dimmable	BTTM
				2700K-5700K	TW					Casambi	CBTM
				Warm to Dim	W2D						
Luke 50 2 Way	2X15W			WW27K		CRI80	17°(SS)	SWH		On/Off	

