

Mojo 50 ITA MD | 12W

Product Reference

Environment Indoor
 Installation Track Mounted

Construction & Materials

Housing Aluminium
 Primary Lens -
 Primary Reflector PC metallised
 Secondary Reflector Anodised
 Body Finish White,Black
 Diffuser -
 Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium
 Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable
 Tilt Yes
 Swivel Yes

Electrical System


Driven with Constant Current Driver
 Input Voltage/Hz 220V- 240V/50-60Hz
 Control Gear Included
 Mounting Integral
 LED Power Watts 10.4W
 System Power Watts 12.0W
 Operating Voltage Vin 220-240Vac
 Power Factor p.f. >0.95

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Mojo 50 ITA MD	12W	WW27K	CRI80	27°	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
Mojo 50 ITA MD	12W	1068	89	2700K	WW27K	27°	White	Non Dimmable
		1104	92	3000K	WW30K		Black	
		1164	97	4000K	NW40K		SBL	
		1188	99	5700K	CW57K			
				2700K-5700K	TW			
Mojo 50 ITA MD	12W			WW27K	CRI80	27°	SWH	On/Off

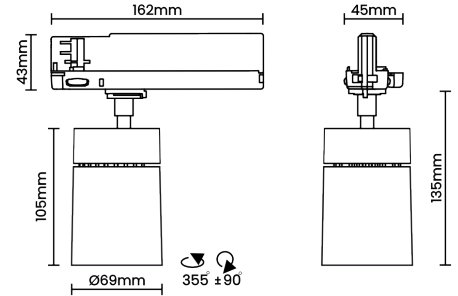

Light Distribution

LED Technology

Binning 3 Step MacAdam
 LED Life Time @ L80/B10 >50000 hours
 Colour Rendering (CRI) CRI80,CRI90
 Led Type COB
 LED Fitted Cree COB LED 33V-36Vdc/300mA

Controls

Standard Switchable On/Off
 Optional -