

# Spa 35 | 8W

## Product Reference

Environment Indoor  
 Installation Ceiling Recess

## Construction & Materials

Housing Aluminium  
 Primary Lens PMMA  
 Primary Reflector PC metallised  
 Secondary Reflector -  
 Body Finish White,Black,Custom  
 Diffuser -  
 Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium  
 Cooling Technique Passive Cooling

## Optical System

Beam Direction Fixed  
 Tilt No  
 Swivel No

## Electrical System


Driven with Constant Current Driver  
 Input Voltage/Hz 220V- 240V/50-60Hz  
 Control Gear Included  
 Mounting Remote  
 LED Power Watts 7.7W  
 System Power Watts 8.8W  
 Operating Voltage Vin 220-240 Vac  
 Power Factor p.f. > 0.95

## Ordering Details


Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	<b>Spa 35</b>	<b>8W</b>	<b>WW27K</b>	<b>CRI80</b>	<b>16°(SS)</b>	<b>SWH</b>	<b>On/Off</b>

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL	
<b>Spa 35</b>	<b>8W</b>	563	64	2700K	<b>WW27K</b>	<b>CRI80</b>	16°(SS)	White	<b>SWH</b>	Non Dimmable	<b>On/Off</b>
		598	68	3000K	<b>WW30K</b>	CRI90	22°(MD)	Black	<b>SBL</b>	Phase Dimmable	<b>PDIM</b>
		634	72	4000K	<b>NW40K</b>		32°(WD)	Custom	<b>CSM</b>	Dali Dimmable	<b>DDIM</b>
		651	74	5700K	<b>CW57K</b>					Bluetooth Dimmable	<b>BTTM</b>
				2700K-5700K	<b>TW</b>					Casambi	<b>CBTM</b>
				2700K-5700K	<b>TW</b>						
				Warm to Dim	<b>W2D</b>						
<b>Spa 35</b>	<b>8W</b>			<b>WW27K</b>		<b>CRI80</b>	<b>16°(SS)</b>	<b>SWH</b>		<b>On/Off</b>	



## Light Distribution

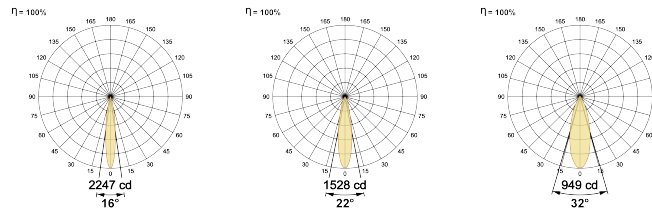

## LED Technology

Binning 3 Step MacAdam  
 LED Life Time @ L70/B10 >50000 hours  
 Colour Rendering (CRI) CRI80,CRI90  
 Led Type COB  
 LED Fitted CREE COB LED 36Vdc/180mA

## Controls

Standard Switchable On/Off  
 Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable