

## Tiny AR | 8W

### Product Reference

Environment Indoor

Installation Ceiling Recess

### Construction & Materials

Housing Aluminium

Primary Lens Polycarbonate

Primary Reflector PC metallised

Secondary Reflector Anodised

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

### Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

### Optical System

Beam Direction Fixed

Tilt Yes

Swivel No

### Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included



Mounting Remote

LED Power Watts 7.2W


System Power Watts 8.3W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. &gt; 0.95

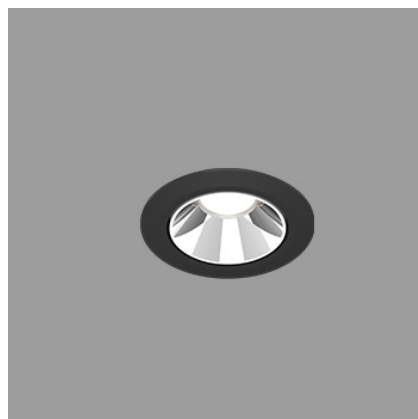

### Light Distribution

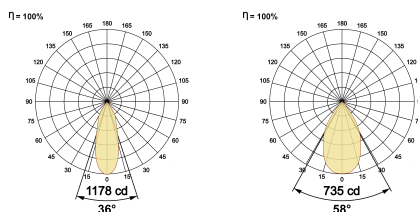

### LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 &gt;50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/180mA

### Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

### Ordering Details

| Code Example: | Name           | Watt      | CCT          | CRI          | Angle          | Finish     | Control       |
|---------------|----------------|-----------|--------------|--------------|----------------|------------|---------------|
|               | <b>Tiny AR</b> | <b>8W</b> | <b>WW27K</b> | <b>CRI80</b> | <b>36°(MD)</b> | <b>SWH</b> | <b>On/off</b> |

Select one from each column with highlighted values to create the ordering code

| NAME    | WATT | LUMEN | EFFICACY | CCT         |       | CRI   | ANGLE   | FINISH |     | CONTROL            |        |
|---------|------|-------|----------|-------------|-------|-------|---------|--------|-----|--------------------|--------|
| Tiny AR | 8W   | 581   | 70       | 2700K       | WW27K | CRI80 | 36°(MD) | White  | SWH | Non Dimmable       | On/off |
|         |      | 598   | 72       | 3000K       | WW30K | CRI90 | 58°(WD) | Black  | SBL | Phase Dimmable     | PDIM   |
|         |      | 631   | 76       | 4000K       | NW40K |       |         | Custom | CSM | Dali Dimmable      | DDIM   |
|         |      | 647   | 78       | 5700K       | CW57K |       |         |        |     | Bluetooth Dimmable | BTTM   |
|         |      |       |          | 2700K-5700K | TW    |       |         |        |     | Casambi            | CBTM   |
|         |      |       |          | Warm to Dim | W2D   |       |         |        |     |                    |        |
| Tiny AR | 8W   |       |          | WW27K       |       | CRI80 | 36°(MD) | SWH    |     | On/off             |        |

