

Tiny XXX | 12W

Product Reference

Environment Indoor

Installation Ceiling Recess

Construction & Materials

Housing Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable

Tilt No

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Remote

LED Power Watts 10.5W

System Power Watts 12.1W

Operating Voltage Vin 220-240 Vac


Power Factor p.f. > 0.95

Ordering Details


Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Tiny XXX	12W	WW27K	CRI80	32° (MD)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
Tiny XXX	12W	920	76	2700K	WW27K	CRI80	32°(MD)	White SWH Non Dimmable On/Off
		944	78	3000K	WW30K	CRI90	40°(WD)	Black SBL Phase Dimmable PDIM
		980	81	4000K	NW40K			Custom CSM Dali Dimmable DDIM
		1004	83	5700K	CW57K			Bluetooth Dimmable BTTM
						2700K-5700K	TW	
				Warm to Dim	W2D			
Tiny XXX	12W			WW27K	CRI80	32°(MD)	SWH	On/Off

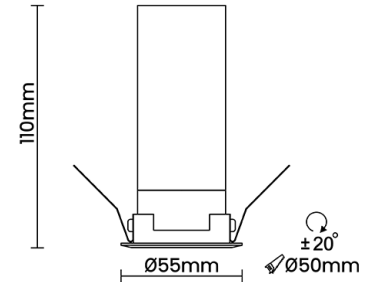

Light Distribution

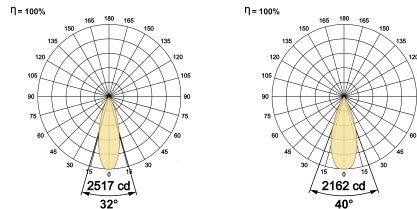

LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted Cree COB LED 33-36Vdc/300mA

Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

Abby reserves the right to discontinue any product from its collection at any time whatsoever and without prior notice

www.abbylighting.com