
ABBY LIGHTING

220V 240V 50/60Hz | CRI 80 | IP65 | L80B10 >50,000h | MacAdam Step 3 | Tilt | UGR<16

Optional: CRI 90

Jugnu | 8W



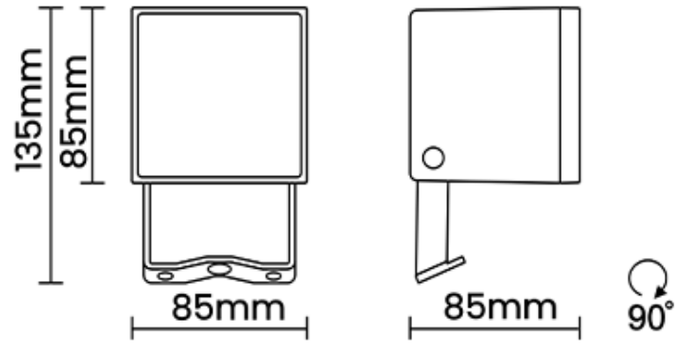

Product Reference

Environment Outdoor

Installation Ceiling Surface,Floor Surface,Wall Surface,Wall Surface

Construction & Materials

Housing Die Cast Aluminium

Primary Lens Tempered Glass Visor

Primary Reflector PC metallised

Secondary Reflector -

Body Finish Black,Grey

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable

Tilt Yes

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Integral


LED Power Watts 6.6W

System Power Watts 8.3W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

Light Distribution

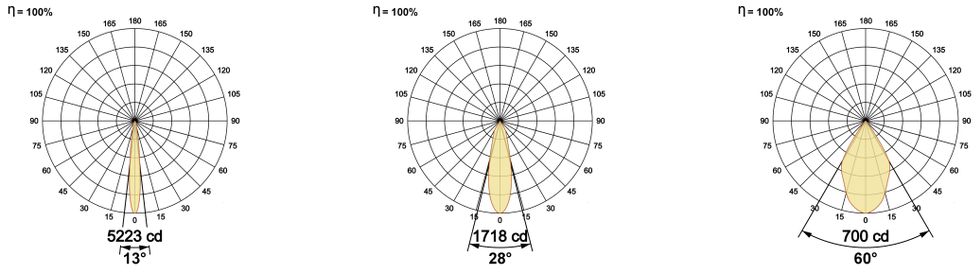

LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 9Vdc/700mA

Controls

Standard Switchable On/Off

Optional Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Jugnu	**8W**	**WW27K**	**CRI80**	**13°(SS)**	**SBL**	**On/Off**

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL	
Jugnu	**8W**	531	64	2700K	**WW27K**	**CRI80**	13°(SS)	Black	**SBL**	Non Dimmable	**On/Off**
		564	68	3000K	**WW30K**	CRI90	28°(MD)	Grey	**GGT**		
		598	72	4000K	**NW40K**		60°(WD)				
		614	74	5700K	**CW57K**						
Jugnu	**8W**			**WW27K**		**CRI80**	**13°(SS)**	**SBL**		**On/Off**	

Abby Lighting & Switchgear Limited 802 A, Fortune Terraces, New Link Road, Opp City Mall, Andheri West, Mumbai - 400053, India.
frontdesk@abbylighting.com, +91 7304623220
www.abbylighting.com

Abby reserves the right to discontinue any product from its collection at any time whatsover and without prior notice