

# Wally | 15W

## Product Reference

Environment Outdoor

Installation Wall Surface,Wall Surface

## Construction & Materials

Housing Die Cast Aluminium

Primary Lens -

Primary Reflector -

Secondary Reflector -

Body Finish White,Black,Grey

Diffuser Premium high-transmission opal

Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Fixed

Tilt No

Swivel No

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Integral

LED Power Watts 12.5W


System Power Watts 14.4W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. &gt; 0.95

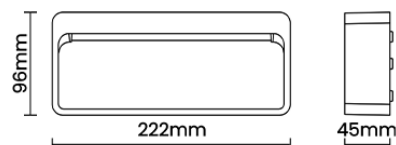

## Light Distribution



## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 &gt;50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type SMD mid power

LED Fitted Samsung Mid power LED array 32-36Vdc/350mA

## Controls

Standard Switchable On/Off

Optional DDIM,Non Dimmable

## Ordering Details

| Code Example: | Name         | Watt       | CCT          | CRI          | Angle | Finish     | Control       |
|---------------|--------------|------------|--------------|--------------|-------|------------|---------------|
|               | <b>Wally</b> | <b>15W</b> | <b>WW27K</b> | <b>CRI80</b> |       | <b>SWH</b> | <b>On/Off</b> |

Select one from each column with highlighted values to create the ordering code

| NAME         | WATT       | LUMEN | EFFICACY | CCT          | CRI          | ANGLE        | FINISH     | CONTROL       |
|--------------|------------|-------|----------|--------------|--------------|--------------|------------|---------------|
| <b>Wally</b> | <b>15W</b> | 562   | 39       | 2700K        | <b>WW27K</b> | <b>CRI80</b> | White      | Non Dimmable  |
|              |            | 590   | 41       | 3000K        | <b>WW30K</b> |              | Black      | On/Off        |
|              |            | 619   | 43       | 4000K        | <b>NW40K</b> |              | Grey       | Dali Dimmable |
|              |            | 648   | 45       | 5700K        | <b>CW57K</b> |              | <b>GGT</b> | <b>DDIM</b>   |
| <b>Wally</b> | <b>15W</b> |       |          | <b>WW27K</b> | <b>CRI80</b> |              | <b>SWH</b> | <b>On/Off</b> |