

# T Zee Dropdown OPD 180 | 30W

## Product Reference

Environment Indoor

Installation Ceiling Recess

## Construction & Materials

Housing Extruded and Sheet Aluminium

Primary Lens -

Primary Reflector White Optics

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser Premium high-transmission opal

Antiglare Baffle -

## Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction General Diffuse

Tilt No

Swivel No

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Integral

LED Power Watts 25.3W

System Power Watts 29.1W

Operating Voltage Vin 220-240Vac

Power Factor p.f. >0.95

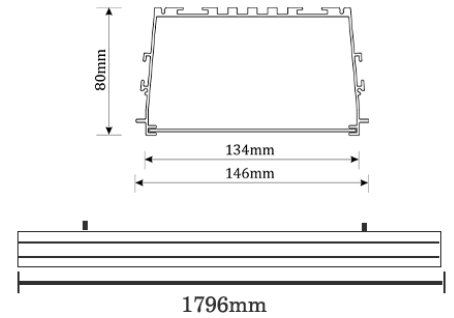

## Light Distribution

## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type SMD mid power

LED Fitted Osram/Samsung Mid power LED array 32V-36Vdc/750mA

## Controls

Standard Switchable On/Off

Optional PDIM,DDIM,CASAMBI,Non Dimmable

## Ordering Details

| Code Example: | Name                          | Watt       | CCT          | CRI          | Angle                       | Finish     | Control       |
|---------------|-------------------------------|------------|--------------|--------------|-----------------------------|------------|---------------|
|               | <b>T Zee Dropdown OPD 180</b> | <b>30W</b> | <b>WW27K</b> | <b>CRI80</b> | <b>101° general diffuse</b> | <b>SWH</b> | <b>On/Off</b> |

Select one from each column with highlighted values to create the ordering code

| NAME                          | WATT       | LUMEN | EFFICACY | CCT          | CRI          | ANGLE                       | FINISH               | CONTROL                    |
|-------------------------------|------------|-------|----------|--------------|--------------|-----------------------------|----------------------|----------------------------|
| <b>T Zee Dropdown OPD 180</b> | <b>30W</b> | 3055  | 105      | 2700K        | <b>WW27K</b> | <b>CRI80</b>                | 101° general diffuse | Non Dimmable <b>On/Off</b> |
|                               |            | 3143  | 108      | 3000K        | <b>WW30K</b> |                             |                      | Phase Dimmable <b>PDIM</b> |
|                               |            | 3288  | 113      | 4000K        | <b>NW40K</b> |                             |                      | Dali Dimmable <b>DDIM</b>  |
|                               |            | 3346  | 115      | 5700K        | <b>CW57K</b> |                             |                      | Casambi <b>CBTM</b>        |
|                               |            |       |          | 2700K-5700K  | <b>TW</b>    |                             |                      |                            |
| <b>T Zee Dropdown OPD 180</b> | <b>30W</b> |       |          | <b>WW27K</b> | <b>CRI80</b> | <b>101° general diffuse</b> | <b>SWH</b>           | <b>On/Off</b>              |

Abby reserves the right to discontinue any product from its collection at any time whatsoever and without prior notice

frontdesk@abbylighting.com, +91 9833645212

[www.abbylighting.com](http://www.abbylighting.com)