

iWash R 168 | 72W

Product Reference

Environment Indoor

Installation Ceiling Recess

Construction & Materials

Housing Extruded Aluminium

Primary Lens PMMA

Primary Reflector PC metallised

Secondary Reflector Black Raster – PC,White Raster – PC

Body Finish White,Black,Custom

Diffuser –

Antiglare Baffle –

Thermal Management

Heat Sink Material Extruded Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed Asymmetric

Tilt No

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Remote

LED Power Watts 62.0W


System Power Watts 71.3W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

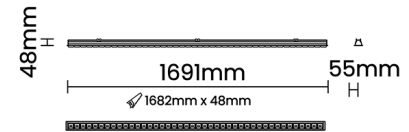

Light Distribution



LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type SMD

LED Fitted Osram/Samsung Mid power LED array 39-42Vdc/1550mA

Controls

Standard Switchable On/Off

Optional DDIM,BTMM,CASAMBI,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	iWash R 168	72W	WW27K	CRI80		SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL	
iWash R 168	72W	6061	85	2700K	WW27K	CRI80		White	SWH	Non Dimmable	On/Off
		6274	88	3000K	WW30K	CRI90		Black	SBL	Dali Dimmable	DDIM
		6631	93	4000K	NW40K			Custom	CSM	Bluetooth Dimmable	BTMM
		6774	95	5700K	CW57K					Casambi	CBTM
				2700K-5700K	TW						
iWash R 168	72W			WW27K		CRI80		SWH		On/Off	