

## ZuG MPD S 120 | 40W

### Product Reference

Environment Indoor

Installation Ceiling Surface

### Construction & Materials

Housing Extruded Aluminium

Primary Lens -

Primary Reflector Aluminium White Painted

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser Microprismatic

Antiglare Baffle Black,White,Custom

### Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

### Optical System

Beam Direction General Diffuse

Tilt No

Swivel No

### Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Integral

LED Power Watts 34.6W


System Power Watts 39.8W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

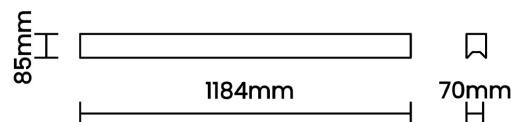

### Light Distribution



### LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type SMD mid power

LED Fitted Samsung Mid Power LED array 33V-36Vdc/1000mA

### Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

### Ordering Details

| Code Example: | Name                 | Watt       | CCT          | CRI          | Angle      | Finish     | Control       |
|---------------|----------------------|------------|--------------|--------------|------------|------------|---------------|
|               | <b>ZuG MPD S 120</b> | <b>40W</b> | <b>WW27K</b> | <b>CRI80</b> | <b>87°</b> | <b>SWH</b> | <b>On/Off</b> |

Select one from each column with highlighted values to create the ordering code

| NAME                 | WATT       | LUMEN | EFFICACY | CCT          | CRI          | ANGLE      | FINISH     | CONTROL            |
|----------------------|------------|-------|----------|--------------|--------------|------------|------------|--------------------|
| <b>ZuG MPD S 120</b> | <b>40W</b> | 3701  | 93       | 2700K        | <b>WW27K</b> | <b>87°</b> | White      | Non Dimmable       |
|                      |            | 3821  | 96       | 3000K        | <b>WW30K</b> |            | Black      | Phase Dimmable     |
|                      |            | 4020  | 101      | 4000K        | <b>NW40K</b> |            | Custom     | Dali Dimmable      |
|                      |            | 4099  | 103      | 5700K        | <b>CW57K</b> |            |            | Bluetooth Dimmable |
|                      |            |       |          | 2700K-5700K  | <b>TW</b>    |            |            | Casambi            |
| <b>ZuG MPD S 120</b> | <b>40W</b> |       |          | <b>WW27K</b> | <b>CRI80</b> | <b>87°</b> | <b>SWH</b> | <b>On/Off</b>      |

