

## Look Around SF | 15W

### Product Reference

Environment Indoor

Installation Ceiling Surface

### Construction & Materials

Housing Die Cast Aluminium

Primary Lens PMMA

Primary Reflector PC metallised

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

### Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

### Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

### Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

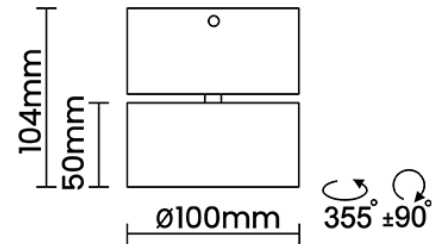
Mounting Integral

LED Power Watts 12.4W




System Power Watts 14.3W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. &gt; 0.95



### Light Distribution

 $\eta = 100\%$ 

 $\eta = 100\%$ 

 $\eta = 100\%$ 


### LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 &gt;50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/350mA

### Controls

Standard Switchable On/Off

Optional PDIM,DDIM,CASAMBI,Non Dimmable

### Ordering Details

| Code Example: | Name                  | Watt       | CCT          | CRI          | Angle          | Finish     | Control       |
|---------------|-----------------------|------------|--------------|--------------|----------------|------------|---------------|
|               | <b>Look Around SF</b> | <b>15W</b> | <b>WW27K</b> | <b>CRI80</b> | <b>18°(SS)</b> | <b>SWH</b> | <b>On/Off</b> |

Select one from each column with highlighted values to create the ordering code

| NAME                  | WATT       | LUMEN | EFFICACY | CCT          | CRI          | ANGLE                              | FINISH     | CONTROL        |
|-----------------------|------------|-------|----------|--------------|--------------|------------------------------------|------------|----------------|
| <b>Look Around SF</b> | <b>15W</b> | 1249  | 87       | 2700K        | <b>WW27K</b> | <b>CRI80</b><br>26°(MD)<br>36°(WD) | White      | Non Dimmable   |
|                       |            | 1301  | 91       | 3000K        | <b>WW30K</b> |                                    | Black      | Phase Dimmable |
|                       |            | 1392  | 97       | 4000K        | <b>NW40K</b> |                                    | Custom     | Dali Dimmable  |
|                       |            | 1418  | 99       | 5700K        | <b>CW57K</b> |                                    |            | Casambi        |
| <b>Look Around SF</b> | <b>15W</b> |       |          | <b>WW27K</b> | <b>CRI80</b> | <b>18°(SS)</b>                     | <b>SWH</b> | <b>On/Off</b>  |