

Luke Pro 50 2Way | 2X15W

Product Reference

Environment Indoor
Installation Ceiling Recess

Construction & Materials

Housing Mild Steel
Primary Lens PMMA
Primary Reflector -
Secondary Reflector -
Body Finish White,Black,Custom
Diffuser -
Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium
Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable
Tilt Yes
Swivel Yes


Electrical System

Driven with Constant Current Driver
Input Voltage/Hz 220V- 240V/50-60Hz
Control Gear Included
Mounting Remote
LED Power Watts 2x12.4W
System Power Watts 2x14.3W
Operating Voltage Vin 220-240 Vac
Power Factor p.f. > 0.95


Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Luke Pro 50 2Way	2X15W	WW27K	CRI80	21°(SS)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

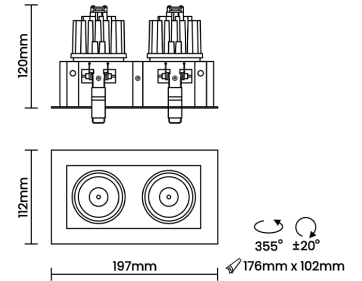

Light Distribution

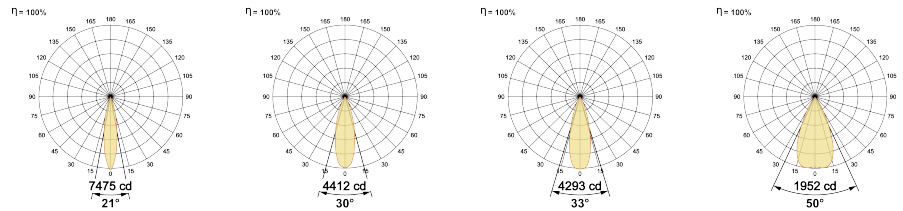

LED Technology

Binning 3 Step MacAdam
LED Life Time @ L80/B10 >50000 hours
Colour Rendering (CRI) CRI80,CRI90
Led Type COB
LED Fitted Cree COB LED 36Vdc/350mA

Controls

Standard Switchable On/Off
Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL	
Luke Pro 50 2Way	2X15W	2x1487	104	2700K	WW27K	CRI80	21°(SS)	White SWH	Non Dimmable On/Off
		2x1530	107	3000K	WW30K	CRI90	30°(MD)	Black SBL	Phase Dimmable PDIM
		2x1602	112	4000K	NW40K		33°(WD)	Custom CSM	Dali Dimmable DDIM
		2x1630	114	5700K	CW57K		50°(VWD)		Bluetooth Dimmable BTTM
				2700K-5700K Warm to Dim	TW W2D				Casambi CBTM
Luke Pro 50 2Way	2X15W			WW27K	CRI80	21°(SS)	SWH	On/Off	

Abby Lighting & Switchgear Limited 802 A, Fortune Terraces, New Link Road, Opp City Mall, Andheri West, Mumbai - 400053, India.

frontdesk@abbylighting.com, +91 9833645212

Abby reserves the right to discontinue any product from its collection at any time whatsoever and without prior notice

www.abbylighting.com