



ABBY
LIGHTING

220V
240V
50/60Hz



CRI 80

IP20

L80B10
>50,000h

MacAdam
Step 3

Swivel
Tilt

UGR<16

Optional

Bluetooth

Dimmable

Tunable
White

Warm to
Dim

CRI 90

Luke 75 2Way | 2X36W

Product Reference

Environment Indoor

Installation Ceiling Recess

Construction & Materials

Housing Mild Steel

Primary Lens -

Primary Reflector PC metallised

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Remote

LED Power Watts 2x31.5W




System Power Watts 2x36.2W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

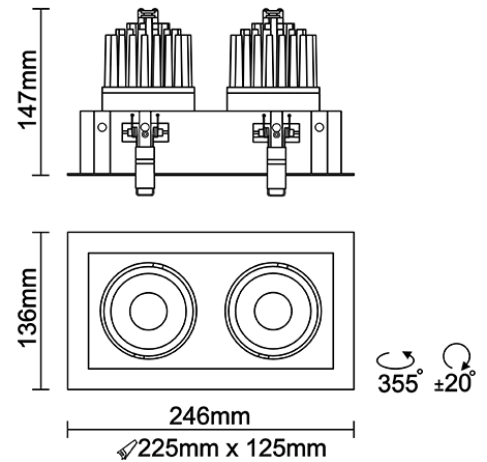

Light Distribution



LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/900mA

Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTDM,CASAMBI,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Luke 75 2Way	2X36W	WW27K	CRI80	16°(SS)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL	
Luke 75 2Way	2X36W	2x2932	81	2700K	WW27K	CRI80	16°(SS)	White	SWH	Non Dimmable	On/Off
		2x3113	86	3000K	WW30K	CRI90	22°(MD)	Black	SBL	Phase Dimmable	PDIM
		2x3330	92	4000K	NW40K		32°(WD)	Custom	CSM	Dali Dimmable	DDIM
		2x3439	95	5700K	CW57K					Bluetooth Dimmable	BTTM
				2700K-5700K Warm to Dim	TW W2D					Casambi	CBTM
Luke 75 2Way	2X36W			WW27K		CRI80	16°(SS)	SWH		On/Off	