

## Romeo Pin Spot | 15W

### Product Reference

Environment Indoor

Installation Ceiling Recess

### Construction & Materials

Housing Die Cast Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

### Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

### Optical System

Beam Direction Fixed

Tilt No

Swivel No

### Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Remote

LED Power Watts 12.6W




System Power Watts 14.5W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

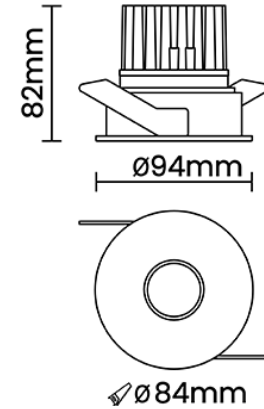

### Light Distribution



### LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/350mA

### Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTMM,CASAMBI,Non Dimmable

### Ordering Details

| Code Example: | Name                  | Watt       | CCT          | CRI          | Angle          | Finish     | Control       |
|---------------|-----------------------|------------|--------------|--------------|----------------|------------|---------------|
|               | <b>Romeo Pin Spot</b> | <b>15W</b> | <b>WW27K</b> | <b>CRI80</b> | <b>28°(MD)</b> | <b>SWH</b> | <b>On/Off</b> |

Select one from each column with highlighted values to create the ordering code

| NAME           | WATT | LUMEN | EFFICACY | CCT         |       | CRI   | ANGLE    | FINISH |     | CONTROL            |        |
|----------------|------|-------|----------|-------------|-------|-------|----------|--------|-----|--------------------|--------|
| Romeo Pin Spot | 15W  | 1233  | 85       | 2700K       | WW27K | CRI80 | 28°(MD)  | White  | SWH | Non Dimmable       | On/Off |
|                |      | 1276  | 88       | 3000K       | WW30K | CRI90 | 34°(WD)  | Black  | SBL | Phase Dimmable     | PDIM   |
|                |      | 1334  | 92       | 4000K       | NW40K |       | 56°(VWD) | Custom | CSM | Dali Dimmable      | DDIM   |
|                |      | 1363  | 94       | 5700K       | CW57K |       |          |        |     | Bluetooth Dimmable | BTMM   |
|                |      |       |          | 2700K-5700K | TW    |       |          |        |     | Casambi            | CBTM   |
|                |      |       |          | Warm to Dim | W2D   |       |          |        |     |                    |        |
| Romeo Pin Spot | 15W  |       |          | WW27K       |       | CRI80 | 28°(MD)  | SWH    |     | On/Off             |        |