

## T Zee MPD 240 | 80W

### Product Reference

Environment Indoor

Installation Ceiling Recess

### Construction & Materials

Housing Extruded and Sheet Aluminium

Primary Lens -



Primary Reflector White Optics

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser Microprismatic

Antiglare Baffle -

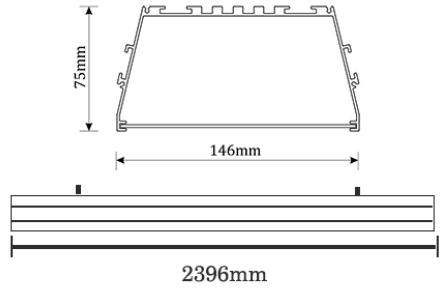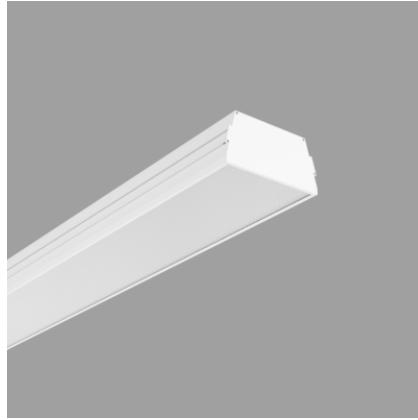

### Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

### Light Distribution

### Optical System

Beam Direction General Diffuse

Tilt No

Swivel No

### LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type SMD mid power

LED Fitted Samsung Mid power LED array 32V-36Vdc/2000mA

### Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Integral

LED Power Watts 68.9W

System Power Watts 79.2W

Operating Voltage Vin 220-240Vac

Power Factor p.f. >0.95

### Controls

Standard Switchable On/Off

Optional PDIM,DDIM,CASAMBI,Non Dimmable

### Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	<b>T Zee MPD 240</b>	<b>80W</b>	<b>WW27K</b>	<b>CRI80</b>	<b>79° general diffuse</b>	<b>SWH</b>	<b>On/Off</b>

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL
<b>T Zee MPD 240</b>	<b>80W</b>	7762	98	2700K	<b>WW27K</b>	<b>CRI80</b>	79° general diffuse	White <b>SWH</b> Non Dimmable <b>On/off</b>
		7999	101	3000K	<b>WW30K</b>	<b>CRI90</b>		Black <b>SBL</b> Phase Dimmable <b>PDIM</b>
		8395	106	4000K	<b>NW40K</b>			Custom <b>CSM</b> Dali Dimmable <b>DDIM</b>
		8554	108	5700K	<b>CW57K</b>			Casambi <b>CBTM</b>
				2700K-5700K	<b>TW</b>			
<b>T Zee MPD 240</b>	<b>80W</b>			<b>WW27K</b>	<b>CRI80</b>	<b>79° general diffuse</b>	<b>SWH</b>	<b>On/off</b>