

# Luke 75 2Way | 2X30W

## Product Reference

Environment Indoor

Installation Ceiling Recess

## Construction & Materials

Housing Mild Steel

Primary Lens -

Primary Reflector PC metallised

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Remote

LED Power Watts 2x25.5W




System Power Watts 2x29.3W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. &gt; 0.95

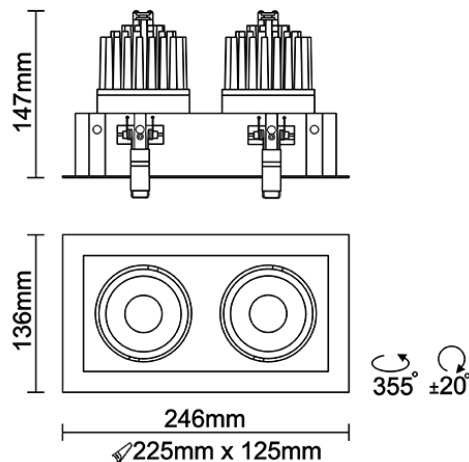

## Light Distribution



## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 &gt;50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/700mA

## Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

## Ordering Details

| Code Example: | Name                | Watt         | CCT          | CRI          | Angle          | Finish     | Control       |
|---------------|---------------------|--------------|--------------|--------------|----------------|------------|---------------|
|               | <b>Luke 75 2Way</b> | <b>2X30W</b> | <b>WW27K</b> | <b>CRI80</b> | <b>16°(SS)</b> | <b>SWH</b> | <b>On/Off</b> |

Select one from each column with highlighted values to create the ordering code

| NAME         | WATT  | LUMEN  | EFFICACY | CCT                        |           | CRI   | ANGLE   | FINISH |     | CONTROL            |        |
|--------------|-------|--------|----------|----------------------------|-----------|-------|---------|--------|-----|--------------------|--------|
| Luke 75 2Way | 2X30W | 2x2637 | 90       | 2700K                      | WW27K     | CRI80 | 16°(SS) | White  | SWH | Non Dimmable       | On/Off |
|              |       | 2x2813 | 96       | 3000K                      | WW30K     | CRI90 | 22°(MD) | Black  | SBL | Phase Dimmable     | PDIM   |
|              |       | 2x3018 | 103      | 4000K                      | NW40K     |       | 32°(WD) | Custom | CSM | Dali Dimmable      | DDIM   |
|              |       | 2x3194 | 109      | 5700K                      | CW57K     |       |         |        |     | Bluetooth Dimmable | BTTM   |
|              |       |        |          | 2700K-5700K<br>Warm to Dim | TW<br>W2D |       |         |        |     | Casambi            | CBTM   |
| Luke 75 2Way | 2X30W |        |          | WW27K                      |           | CRI80 | 16°(SS) | SWH    |     | On/Off             |        |