

# Husky 25 | 15W

## Product Reference

Environment Outdoor

Installation Floor Surface

## Construction & Materials

Housing Die Cast Aluminium, Extruded Aluminium

Primary Lens -

Primary Reflector Aluminium White Painted

Secondary Reflector -

Body Finish Black, Grey

Diffuser Clear PC

Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Fixed

Tilt No

Swivel No

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included



Mounting Integral

LED Power Watts 12.5W


System Power Watts 14.4W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. &gt; 0.95

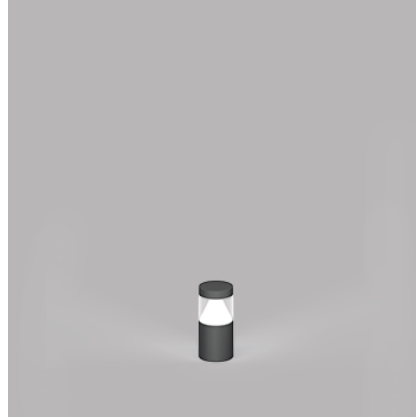

## Light Distribution



## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 &gt;50000 hours

Colour Rendering (CRI) CRI80, CRI90

Led Type SMD mid power

LED Fitted -

## Controls

Standard Switchable On/Off

Optional PDIM, DDIM, BTM, CASAMBI, Non Dimmable

## Ordering Details

| Code Example: | Name            | Watt       | CCT          | CRI          | Angle       | Finish     | Control       |
|---------------|-----------------|------------|--------------|--------------|-------------|------------|---------------|
|               | <b>Husky 25</b> | <b>15W</b> | <b>WW27K</b> | <b>CRI80</b> | <b>140°</b> | <b>SBL</b> | <b>On/Off</b> |

Select one from each column with highlighted values to create the ordering code

| NAME     | WATT | LUMEN | EFFICACY | CCT   |       | CRI   | ANGLE | FINISH             |     | CONTROL        |  |        |
|----------|------|-------|----------|-------|-------|-------|-------|--------------------|-----|----------------|--|--------|
| Husky 25 | 15W  | 1339  | 93       | 2700K | WW27K | CRI80 | 140°  | Black              | SBL | Non Dimmable   |  | On/Off |
|          |      | 1382  | 96       | 3000K | WW30K | CRI90 |       | Grey               | GGT | Phase Dimmable |  | PDIM   |
|          |      | 1469  | 102      | 4000K | NW40K |       |       | Dali Dimmable      |     | DDIM           |  |        |
|          |      | 1512  | 105      | 5700K | CW57K |       |       | Bluetooth Dimmable |     | BTTM           |  |        |
|          |      |       |          |       |       |       |       |                    |     | Casambi        |  | CBTM   |
| Husky 25 | 15W  |       |          | WW27K |       | CRI80 | 140°  | SBL                |     | On/Off         |  |        |