



INVICTUS

A Synergy Of Design And Function

INVICTUS IS SUITABLE ACROSS APPLICATIONS-COMMERCIAL, RESIDENCES OR RETAIL AREAS



DESIGN STRATEGY

Architectural decorative lighting seems to be the need of the hour. The concept was to design a luminaire that is versatile & can be custom designed to meet specifiers' requirement. A design that combines tradition & modernity, style & personality. The Invictus luminaire sheds a subtle & delicate light under its large evocative shape. The Invictus makes for a statement piece with its delicate mix of casual adaptability and a touch of luxe elegance.

Abby lighting's consistent belief is to make lighting simple for their customers. In the spirit of '**made easy**', Abby provides the simplest and most dependable path to customised, energy efficient and future-proof lighting solutions.

lights. **tunable.** made easy

Tunable White for light atmospheres 2700k-5700k

lights. **wireless.** made easy

Trouble-free control solution to design, install and commission

lights. **color.** made easy

Because Life is not just Black, White or Gray

lights. **human centric.** made easy

The Right Light at the Right time



BESPOKE Completely customize the Invictus: Promote healthier lighting environments by incorporating an uplight. Prefer living in color! Ask for our custom color options.



AESTHETICS Hand crafted spun aluminium with soft accents takes off the bulkiness of the banal drum-like fixtures.

INVICTUS FLOAT

Soft and smooth indirect light that filters from the Invictus Float, fills the space with a warm glow that's not harsh on the eyes... just like a conventional indirect light, but infinitely classier.



TIMELESS Iconic and functional, Invictus 35 also available with E27 lamp holder, for those who want to stay with the contemporary look.

Impeccable • Iconic • Impressive • INVICTUS




lights. **color.** made easy

Because Life is not just Black, White or Gray



INVICTUS

CRI80 As Standard | L70B10 >50,000 h | MacAdam Step 3 | 220V-240V | 50/60 Hz

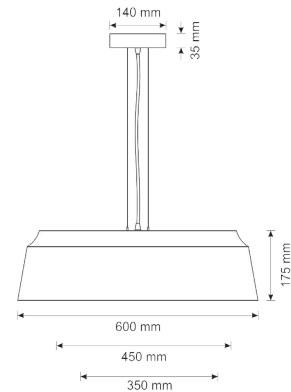

PRODUCT CODE DATA

Code Example: Product Name **A** Watt **B** Direct/Indirect **C** CCT **D** Finish **E** Dimming **F**

To order Invictus Pendant 60 40W Direct /Indirect light distribution 4000K Black finish Dali Dimming -
Order code: **Invictus P 60 40W D/I NW40K SBL DDIM**

Product Name	Watt	Distribution	CCT	Finish	Dimming
INVICTUS P/S 35	20W/28W	Direct	2700K WW27K	White SWH	Non Dimmable
INVICTUS P/S 45	20W/28W	Direct/Indirect D/I	3000K WW30K	Black SBL	Phase Dimmable PDIM
INVICTUS P/S 60	28W/40W		4000K NW40K	Custom CSM	Analog Dimming ADIM
			5700K CW57K		DALI Dimming DDIM
					WireFree BLE

Product Name	Watt	Distribution	CCT	Finish	Dimming
INVICTUS AIR P/S 35	20W/28W	Direct	2700K WW27K	White SWH	Non Dimmable
INVICTUS AIR P/S 45	20W/28W	Direct/Indirect D/I	3000K WW30K	Black SBL	Phase Dimmable PDIM
INVICTUS AIR P/S 60	28W/40W		4000K NW40K	Custom CSM	Analog Dimming ADIM
			5700K CW57K		DALI Dimming DDIM
					WireFree BLE

TECHNICAL DATA

Type	Watts	*Lumen	Efficacy
INVICTUS 35	20W	2084	109
	28W	2750	109
INVICTUS 45	20W	2185	107
	28W	2998	107
INVICTUS 60	28W	2975	110
	40W	4331	110
INVICTUS AIR 35	20W	2084	108
	28W	2750	103
INVICTUS AIR 45	20W	2185	115
	28W	2998	114
INVICTUS AIR 60	28W	2975	114
	40W	4331	108

ACCESSORIES

Complete with adjustable suspension kit of length 1500mm

Color Rendering **CRI80 as standard** Binning **3 step MacAdam** Driven with **Constant Current Driver** Input Voltage **220V- 240V/50-60Hz** Control Gear/Mounting **Included/Integral** Housing **Spun Aluminium** Lens Or Diffuser **Premium High Transmission Opal PC** Operating Temperature **0°C - 50°C** Appliance Class **Class 1** Impact Resistance **NV** Photobiological Safety **RG-0 No Risk** Heat Sink Material **Aluminium** Cooling Technique **Passive Cooling** Beam Direction **Fixed - General diffuse** Tilt **No** Swivel **No** Standard **Switchable On/Off**

*Lumen data represented is of CCT 4000k. All D/I models (applicable for pendant versions only) will have light distribution of 80% direct and 20% indirect.

Abby tries to ensure all data and information is correct at the time of publication. The values contained in this data sheet can change due to technical innovations. Any such change will be made without separate notification. For more details consult Abby representative/visit www.abbylighting.com

