

# Roa Deep OPD 240 | 56W

## Product Reference

Environment Indoor

Installation Ceiling Suspended

## Construction & Materials

Housing Extruded Aluminium

Primary Lens -

Primary Reflector -

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser Premium high-transmission opal

Antiglare Baffle -

## Thermal Management

Heat Sink Material Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Fixed

Tilt -

Swivel -

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included


Mounting Integral

LED Power Watts 48.0W

System Power Watts 55.2W

Operating Voltage Vin 220-240Vac

Power Factor p.f. >0.95

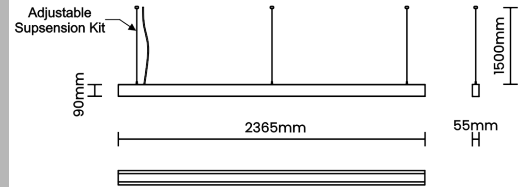

## Light Distribution

### LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type SMD mid power

LED Fitted 39.2

### Controls

Standard Switchable On/Off

Optional DDIM,CASAMBI

## Ordering Details

| Code Example: | Name                    | Watt       | CCT          | CRI          | Angle      | Finish     | Control       |
|---------------|-------------------------|------------|--------------|--------------|------------|------------|---------------|
|               | <b>Roa Deep OPD 240</b> | <b>56W</b> | <b>WW27K</b> | <b>CRI80</b> | <b>94°</b> | <b>SWH</b> | <b>On/Off</b> |

Select one from each column with highlighted values to create the ordering code

| NAME             | WATT | LUMEN | EFFICACY | CCT         |       | CRI   | ANGLE | FINISH |     | CONTROL       |        |
|------------------|------|-------|----------|-------------|-------|-------|-------|--------|-----|---------------|--------|
| Roa Deep OPD 240 | 56W  | 4637  | 84       | 2700K       | WW27K | CRI80 | 94°   | White  | SWH | Non Dimmable  | On/Off |
|                  |      | 4802  | 87       | 3000K       | WW30K | CRI90 |       | Black  | SBL | Dali Dimmable | DDIM   |
|                  |      | 5023  | 91       | 4000K       | NW40K |       |       | Custom | CSM | Casambi       | CBTM   |
|                  |      | 5133  | 93       | 5700K       | CW57K |       |       |        |     |               |        |
|                  |      |       |          | 2700K-5700K | TW    |       |       |        |     |               |        |
| Roa Deep OPD 240 | 56W  |       |          | WW27K       |       | CRI80 | 94°   | SWH    |     | On/Off        |        |