

Mojo 50 HGB WD | 18W

Product Reference

Environment Indoor

Installation Track Mounted

Construction & Materials

Housing Aluminium

Primary Lens -

Primary Reflector PC metallised

Secondary Reflector Anodised

Body Finish White,Black

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included



Mounting Integral

LED Power Watts 15.7W

System Power Watts 18.0W

Operating Voltage Vin 220-240Vac

Power Factor p.f. >0.95

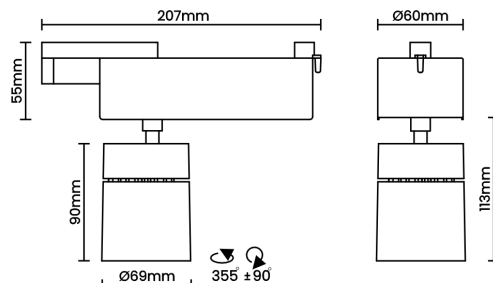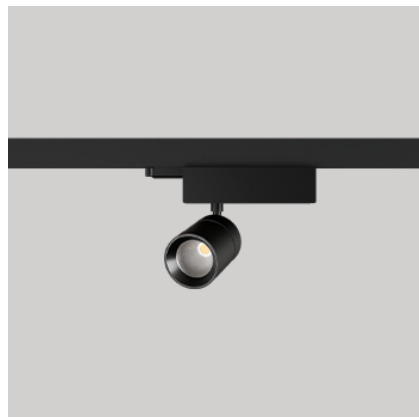

Light Distribution

LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted Cree COB LED 33V-36Vdc/450mA

Controls

Standard Switchable On/Off

Optional DDIM,BTDM,CASAMBI

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Mojo 50 HGB WD	18W	WW27K	CRI80	42°	SWH	DDIM

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL	
Mojo 50 HGB WD	18W	92	1656	2700K	WW27K	CRI80	42°	White	SWH	Dali Dimmable	DDIM
		95	1710	3000K	WW30K	CRI90		Black	SBL	Bluetooth Dimmable	BTDM
		100	1800	4000K	NW40K					Casambi	CBTM
		102	1836	5700K	CW57K						
Mojo 50 HGB WD	18W			WW27K		CRI80	42°	SWH		DDIM	