

ABBY LIGHTING

220V 240V 50/60Hz | IP20 | L80B10 >50,000h | MacAdam Step 3 | CRI 90

Optional: Bluetooth | Dimmable

Dark Knight TL Wash | 17W

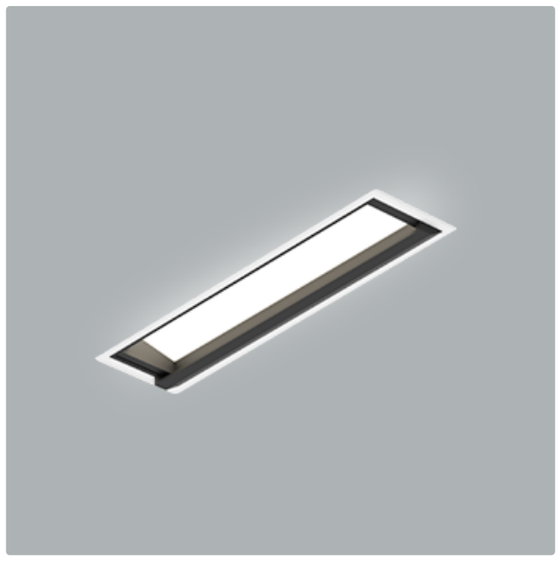

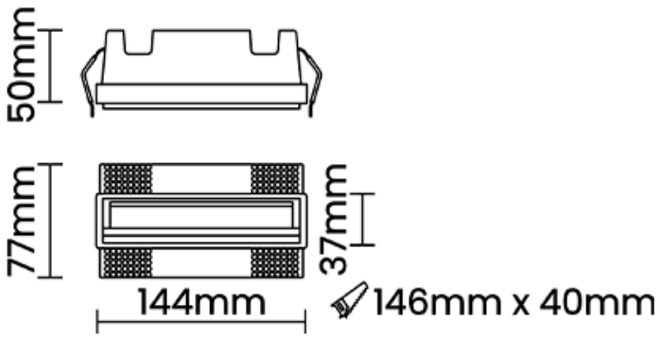

Product Reference

Environment Indoor

Installation Ceiling Recess

Construction & Materials

Housing Die Cast Aluminium

Primary Lens -

Primary Reflector PC metallised

Secondary Reflector Black Raster – ABS

Body Finish White,Black,Custom

Diffuser Premium high-transmission opal

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed Asymmetric

Tilt No

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Remote


LED Power Watts 14.6W

System Power Watts 16.8W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

Light Distribution



LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI90

Led Type SMD high power

LED Fitted -

Controls

Standard Switchable On/Off

Optional PDIM,DDIM,BTTM,CASAMBI,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Dark Knight TL Wash	**17W**	**WW27K**	**CRI90**		**SWH**	**On/Off**

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL	
Dark Knight TL Wash	**17W**	941	56	2700K	**WW27K**	**CRI90**		White	**SWH**	Non Dimmable	**On/Off**
		974	58	3000K	**WW30K**			Black	**SBL**	Phase Dimmable	**PDIM**
		1042	62	4000K	**NW40K**			Custom	**CSM**	Dali Dimmable	**DDIM**
		1075	64	5700K	**CW57K**					Bluetooth Dimmable	**BTTM**
										Casambi	**CBTM**
Dark Knight TL Wash	**17W**			**WW27K**		**CRI90**		**SWH**		**On/Off**	