
ABBY LIGHTING

220V 240V 50/60Hz | CRI 80 | IP20 | L80B10 >50,000h | MacAdam Step 3 | UGR<16

Optional: Dimmable | CRI 90

Ovo Carbon S 50 | 8W



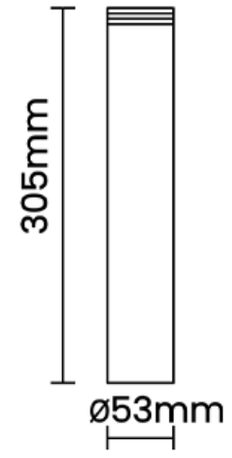

Product Reference

Environment Indoor

Installation Ceiling Surface

Construction & Materials

Housing Aluminium

Primary Lens PMMA

Primary Reflector PC metallised

Secondary Reflector -

Body Finish White,Black,Custom

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Fixed

Tilt No

Swivel No

Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included

Mounting Integral


LED Power Watts 7.5W

System Power Watts 8.6W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.95

Light Distribution

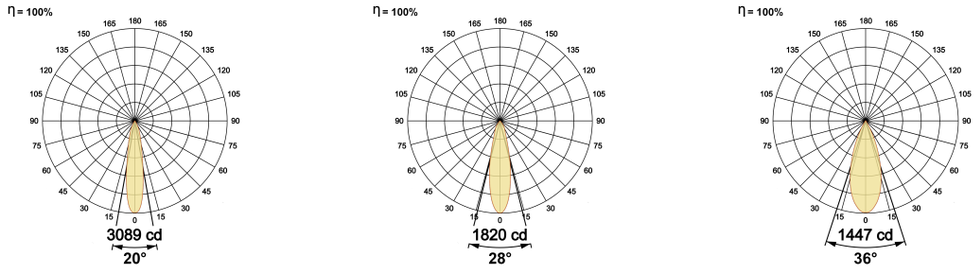

LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/180mA

Controls

Standard Switchable On/Off

Optional PDIM,DDIM,CASAMBI,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Ovo Carbon S 50	**8W**	**WW27K**	**CRI80**	**20°(SS)**	**SWH**	**On/Off**

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL	
Ovo Carbon S 50	**8W**	550	64	2700K	**WW27K**	**CRI80**	20°(SS)	White	**SWH**	Non Dimmable	**On/Off**
		585	68	3000K	**WW30K**	CRI90	28°(MD)	Black	**SBL**	Phase Dimmable	**PDIM**
		620	72	4000K	**NW40K**		36°(WD)	Custom	**CSM**	Dali Dimmable	**DDIM**
		637	74	5700K	**CW57K**					Casambi	**CBTM**
Ovo Carbon S 50	**8W**			**WW27K**		**CRI80**	**20°(SS)**	**SWH**		**On/Off**	

Abby Lighting & Switchgear Limited 802 A, Fortune Terraces, New Link Road, Opp City Mall, Andheri West, Mumbai - 400053, India.

frontdesk@abbylighting.com, +91 7304623220

www.abbylighting.com

Abby reserves the right to discontinue any product from its collection at any time whatsover and without prior notice