

# Go Pro 35 TL | 5W

## Product Reference

Environment Indoor

Installation Ceiling Recess

## Construction & Materials

Housing Die Cast Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector Anodised

Body Finish White,Black

Diffuser -

Antiglare Baffle -

## Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

## Optical System

Beam Direction Fixed

Tilt No

Swivel No

## Electrical System

Driven with Constant Current Driver

Input Voltage/Hz 220V- 240V/50-60Hz

Control Gear Included



Mounting Remote

LED Power Watts 3.4W


System Power Watts 4.2W

Operating Voltage Vin 220-240 Vac

Power Factor p.f. > 0.5

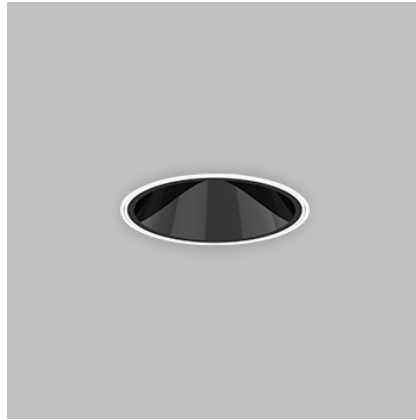

## Light Distribution

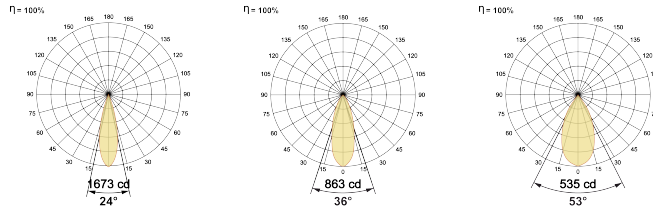

## LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted CREE COB LED 36Vdc/130mA

## Controls

Standard Switchable On/Off

Optional PDIM,DDIM,CASAMBI,Non Dimmable

## Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Go Pro 35 TL	5W	WW27K	CRI80	24°(MD)	SWH	On/off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT	CRI	ANGLE	FINISH	CONTROL	
Go Pro 35 TL	5W	420	100	2700K	WW27K	CRI80	24°(MD)	White SWH	Non Dimmable On/Off
		433	103	3000K	WW30K	CRI90	36°(WD)	Black SBL	Phase Dimmable PDIM
		454	108	4000K	NW40K		52°(VWD)		Dali Dimmable DDIM
		466	111	5700K	CW57K				Bluetooth Dimmable BTM
					Warm to Dim W2D				Casambi CBTM
Go Pro 35 TL	5W			WW27K	CRI80	24°(MD)	SWH	On/off	