

Peeping Tom 48V | 2X10.8W

Product Reference

Environment Indoor

Installation Track Mounted

Construction & Materials

Housing Die Cast Aluminium,Milled Aluminium

Primary Lens PMMA

Primary Reflector -

Secondary Reflector -

Body Finish White,Black

Diffuser -

Antiglare Baffle -

Thermal Management

Heat Sink Material Die cast Aluminium

Cooling Technique Passive Cooling

Optical System

Beam Direction Adjustable

Tilt Yes

Swivel Yes

Electrical System

Driven with Constant Voltage Driver

Input Voltage/Hz 48V

Control Gear Included


Mounting Remote

LED Power Watts 2X10.6W




System Power Watts -

Operating Voltage Vin 48V

Power Factor p.f. -

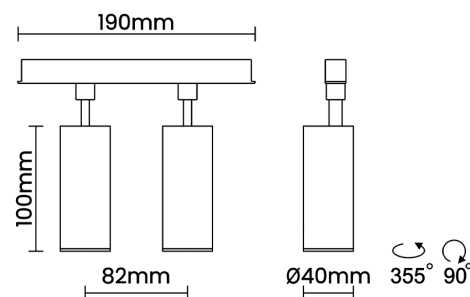

Light Distribution



LED Technology

Binning 3 Step MacAdam

LED Life Time @ L80/B10 >50000 hours

Colour Rendering (CRI) CRI80,CRI90

Led Type COB

LED Fitted Cree COB LED 36Vdc/300mA

Controls

Standard Switchable On/Off

Optional DDIM,CASAMBI,Non Dimmable

Ordering Details

Code Example:	Name	Watt	CCT	CRI	Angle	Finish	Control
	Peeping Tom 48V	2X10.8W	WW27K	CRI80	28°(MD)	SWH	On/Off

Select one from each column with highlighted values to create the ordering code

NAME	WATT	LUMEN	EFFICACY	CCT		CRI	ANGLE	FINISH		CONTROL	
Peeping Tom 48V	2X10.8W	2x1018	96	2700K	WW27K	CRI80	28°(MD)	White	SWH	Non Dimmable	On/Off
		2x1049	99	3000K	WW30K	CRI90	36°(WD)	Black	SBL	Dali Dimmable	DDIM
		2x1102	104	4000K	NW40K		57°(VWD)			Casambi	CBTM
		2x1124	106	5700K	CW57K						
				2700K-5700K Warm to Dim	TW W2D						
Peeping Tom 48V	2X10.8W			WW27K		CRI80	28°(MD)	SWH		On/off	

